

Dock Installation
WOOD / COMPOSITE DECK

PARTS

- » Fish Cleaning Station
- » Mounting Hardware

MOUNTING HARDWARE

- » 3/8" S/S Lag Bolt - 3" Long
- » Plastic Washers
- » S/S Flat Washers
- » S/S Lock Washers

HARDWARE DETAIL

To help prevent damage to powder coating such as chipping, scratching, oxidizing, etc., all hardware **MUST** be installed following the order in our installation guide

IMPORTANT

Safety is the #1 goal. Always wear task appropriate protective gear such as OSHA-approved glasses, gloves, work boots, etc. Make sure you have all supplemental materials and included hardware and parts prior to beginning the installation process.


Dock Installation:

WOOD / COMPOSITE DECK

Before you get started, remember to:


- » Measure to confirm the table fits in the space
- » Gather the tools, hardware and parts for installation
- » Find a friend to lend a hand

1

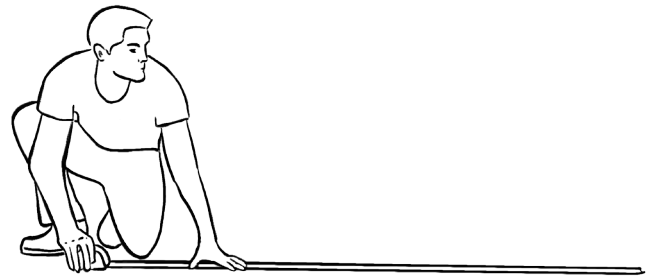

With a friend, position the table base in the allotted space for wood/composite deck installation.


2

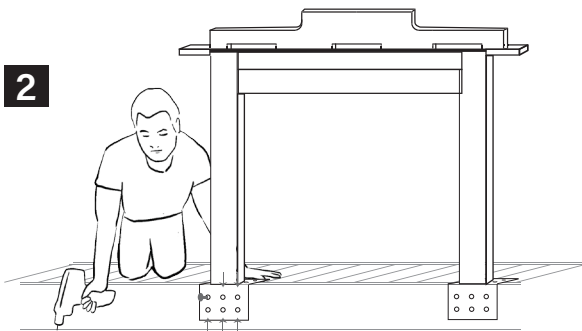

Side Dock Mount:

- » Secure the L bracket flush to the dock
- » Drill first pilot hole through side mount
- » Drive down Lag Bolt halfway with Impact Drill
- » Continue until all side mount holes and bolts are completed

3

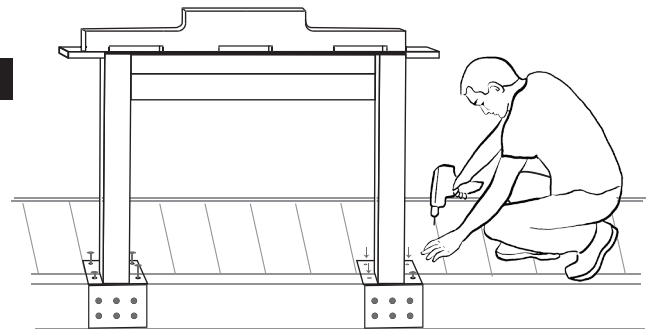


Top Dock Mount:

- » Drill first pilot hole through top mount
- » Drive down Lag Bolt halfway with Impact Drill
- » Continue until all top mount holes and bolts are completed

***Use washers for all hardware**

4

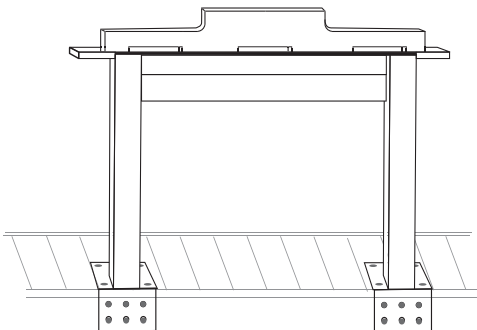

Tighten all side mount and top mount bolts using a drill.

HAVE QUESTIONS?

Contact our installation team at:

- » Orders@SeaWardSystems.com
- » **954-571-2339 x102**

